



PROPRIETA' RISERVATA: a sensi di legge e' vietato riprodurre o cedere a terzi questo disegno senza autorizzazione specifica.



### Technical and electric features

Breaking capacity: C1 16A/250V ac C2 6A/250V ac  
 Minimum current: 200 mA  
 Case material: self-extinguishing thermoplastic  
 Connection through terminals  
 Protection degree : IP40  
 Weight: 190 gr.

Customer approval:  
 Date:        /        /  
 Signature:  
 Customer stamp:

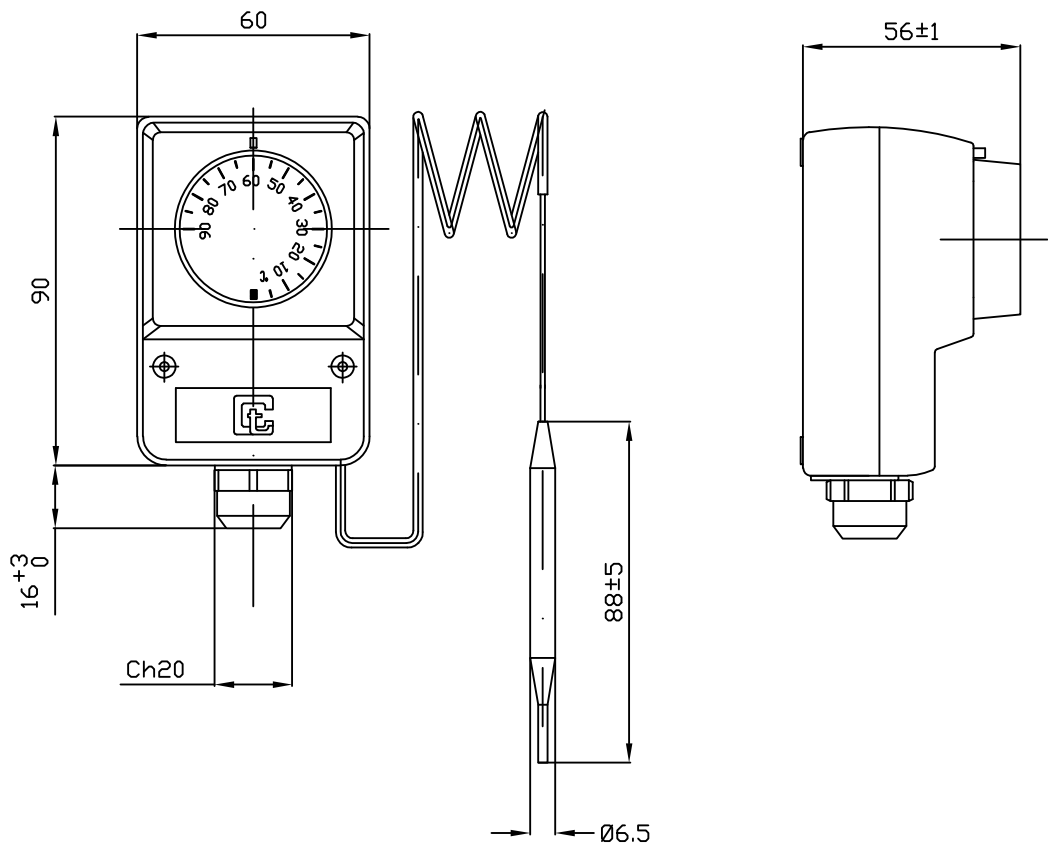

Copper probe Diam. 6.5mm x 88mm  
 Capillary length 1300mm

Data sheet:  
 Working range: 0°C÷90°C  
 Calibration temperature: 90°C ±5K  
 Max ambient temperature: 90°C

Ediz./Issue	Data/Date	Dis./Drawer	Modifiche / Modifications		
Toll. generali: ±0,5	Fori/interassi: ±0,5	Angoli: 45°	Viti: 6g	Madreviti: 6H	
Descrizione/Description: Encased thermoregulator TS9520			Scala: 1:2		
Cliente/Customer: LVS HEATING			Cod. cliente / Customer's code		
Applicazione/Appliance: --			--		
Data: 23/04/21	Disegnatore: Beretta	Controllato:	Codice / Code		Rev.
			TS9520.02/05317		1

STE\_014 06/02